



## NDL Właz kanałowy

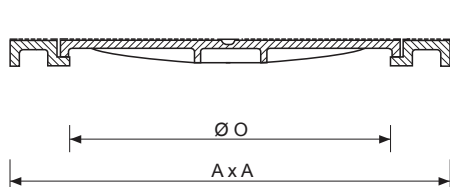

B125

Klasa B125  
zastosowanie: ruch pieszy

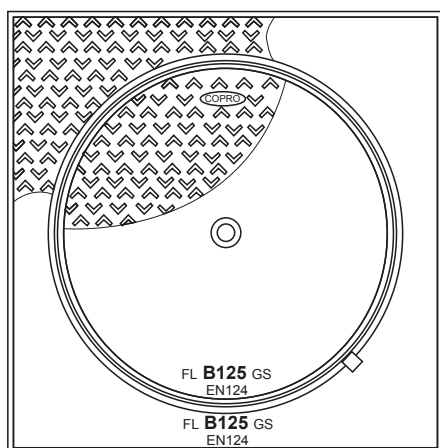

- Wyprodukowany zgodnie z normą EN 124 zatwierdzony przez certyfikowane laboratorium COPRO
- Żeliwo sferoidalne
- Klasa B125



OPIS	WYMIARY			KG	KLASA	PAK.
	A X A	Ø O	H			
NDL 30	300	175	18	6	B 125	24/48/96
NDL 40	400	247	20	11	B 125	24/48/96
NDL 50	500	350	30	19	B 125	20/40
NDL 60	600	423	30	26.5	B 125	20/40
NDL 70	700	496	35	39	B 125	15
NDL 80	800	610	35	67	B 125	10